



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF:

Koji TAKAHASHI

SERIAL NO: 09/939,703

GROUP ART UNIT: 2625

FILED: August 28, 2001

EXAMINER: BAYAT, ALI

FOR: METHOD AND APPARATUS FOR CORRECTING WHITE BALANCE,

METHOD FOR CORRECTING DENSITY AND A RECORDING MEDIUM ON

WHICH A PROGRAM FOR CARRYING OUT THE METHODS IS RECORDED

CERTIFICATION OF TRANSLATION

HONORABLE COMMISSIONER OF PATENTS & TRADEMARKS

P.O. Box 1450, Alexandria, VA 22313-1450

SIR:

I, Ikumi MOTOSU, residing at c/o ION PATENT of HAYAKAWA-TONAKAI BLDG.3F., 12-5, IWAMOTO-CHO 2-CHOME, CHIYODA-KU, TOKYO 101-0032 JAPAN declare:

(1) that I know well both the Japanese and English languages;

(2) that I translated the attached document identified as corresponding to Japanese Application No. 2000-257469 filed in Japan on August 28, 2000 from Japanese to English;

(3) that the attached English translation is a true and correct translation of the document attached thereto to the best of my knowledge and belief; and

(4) that all statements made of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements are made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both under 18 USC 1001, and that such false statements may jeopardize the validity of the application or any patent issuing thereon.

Date: November 26, 2004

Name:

Ikumi Motosu  
Ikumi MOTOSU

PATENT OFFICE  
JAPANESE GOVERNMENT

This is to certify that the annexed is a true copy of the following application as filed with this Office.

Date of Application: August 28, 2000

Application Number: Japanese Patent Application  
No. 2000-257469

Applicant: Fuji Photo Film Co., Ltd.

March 16, 2001

Commissioner,  
Patent Office  
Kozo OIKAWA

Certificate No. 2001-3020597

Japanese Patent Application No. 2000-257469

[TYPE OF THE DOCUMENT] APPLICATION FOR PATENT  
[REFERENCE NUMBER] FF310049  
[FILING DATE] August 28, 2000  
[DESTINATION] Commissioner of the Patent Office  
[INTERNATIONAL PATENT CLASSIFICATION] H04N 9/73  
[TITLE OF THE INVENTION] Apparatus for Correcting White Balance, Method of Correcting White Balance, and a Recording Medium on Which a Program for Carrying out the Method Is Recorded  
[NUMBER OF CLAIMS] 11  
[INVENTOR]  
[DOMICILE OR RESIDENCE] c/o Fuji Photo Film Co., Ltd., 210, Nakanuma, Minami-ashigara-shi, Kanagawa  
[NAME] Koji TAKAHASHI  
[APPLICANT FOR PATENT]  
[IDENTIFICATION NO.] 000005201  
[NAME] Fuji Photo Film Co., Ltd.  
[AGENT]  
[IDENTIFICATION NO.] 100080159  
[PATENT ATTORNEY]  
[NAME] Mochitoshi WATANABE  
[TELEPHONE NO.] 3864-4498  
[INDICATION OF CHARGE]  
[DEPOSIT RECORD NO.] 006910  
[AMOUNT OF PAYMENT] 21000 yen  
[LIST OF ATTACHED DOCUMENT]  
[TYPE OF DOCUMENT] Specification 1 set  
[TYPE OF DOCUMENT] Drawing 1 set  
[TYPE OF DOCUMENT] Abstract 1 set  
[GENERAL POWER OF ATTORNEY NO.] 9800463  
[REQUEST FOR PROOF] YES

[TYPE OF THE DOCUMENT]                      Specification  
[TITLE OF THE INVENTION]                    APPARATUS FOR CORRECTING WHITE  
BALANCE, METHOD OF CORRECTING WHITE BALANCE, AND A RECORDING  
MEDIUM ON WHICH A PROGRAM FOR CARRYING OUT THE METHOD IS  
RECORDED  
[CLAIMS]

[Claim 1]

A method of correcting white balance, comprising the steps of estimating, by using gray and/or skin color information contained in an input color image, a color temperature of a photographing light source with which the color image has been formed, and  
correcting an image signal of the color image based on the estimated color temperature.

[Claim 2]

The method of correcting white balance according to claim 1, wherein only said gray and skin color information is used.

[Claim 3]

The method of correcting white balance according to claim 1, wherein said estimating step includes multiplying image signals of each pixel in the input color image by set coefficients, subsequently setting pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels and/or pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels, optimizing the coefficients so that the number of the skin color candidate pixels and/or the gray candidate pixels is maximized, and estimating said color temperature of said photographing light source from an average color temperature of a group of skin color candidate pixels and/or an average color temperature of a group of gray candidate pixels obtained by optimizing the coefficients, and wherein

said image signals of the color image multiplied by the optimized coefficients are corrected by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[Claim 4]

The method of correcting white balance according to claim 3, wherein the color temperature of the photographing light source is estimated from the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels obtained by optimizing the coefficients so that the number of the skin color candidate pixels and the gray candidate pixels is maximized.

[Claim 5]

The method of correcting white balance according to claim 1, wherein said estimating step includes multiplying image signals of each pixel in the input color image by set coefficients, subsequently setting in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels and pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels,

estimating said color temperature of said photographing light source from an average color temperature of the group of skin color candidate pixels and an average color temperature of the group of gray candidate pixels obtained by optimizing the coefficients so that a difference between the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels is minimized, and wherein

said image signals of the color image multiplied by the optimized coefficients are corrected by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[Claim 6]

The method of correcting white balance according to claim 1, wherein said estimating step includes multiplying image signals of each pixel in the input color image by set coefficients, subsequently setting pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels and pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels,

optimizing the coefficients so that the number of the skin color candidate pixels and the gray candidate pixels is maximized and a difference between an average color temperature of the group of skin color candidate pixels and an average color temperature of the group of gray candidate pixels is minimized, and estimating said color temperature of said photographing light source from the average color temperatures of the group of skin color candidate pixels and the group of gray candidate pixels obtained by optimizing the coefficients, and wherein

said image signals of the color image multiplied by the optimized coefficients are corrected by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[Claim 7]

The method of correcting white balance according to any one of claims 2 to 6, wherein, when each of the blackbody locus curve of the skin color and the blackbody locus curve of the gray is set, a spectral sensitivity of a photographing apparatus used to photograph the input image is used as a spectral sensitivity distribution.

[Claim 8]

The method of correcting white balance according to any one of claims 2 to 6, wherein, when each of the blackbody locus curve of the skin color and the blackbody

locus curve of the gray is set, a spectral sensitivity of BT709 is used as a spectral sensitivity distribution.

[Claim 9]

An apparatus for correcting white balance when digital image processing is performed on an input color image to form a print, comprising

an estimation means for estimating, by using gray and/or skin color information contained in the input color image, a color temperature of a photographing light source with which a color image has been photographed, and

a correction means for correcting an image signal of the color image based on the estimated color temperature.

[Claim 10]

The apparatus for correcting white balance according to claim 9, wherein

said estimation means for estimating a color temperature of the photographing light source includes

a multiplication means for multiplying image signals of each pixel in the input color image by set coefficients,

a detection means for detecting, based on the result of multiplication, pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels, and a detection means for detecting, based on the result of multiplication, pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels,

an optimization means for optimizing the coefficients so that the number of the skin color candidate pixels and the gray candidate pixels is maximized or an optimization means for optimizing the coefficients so that a difference between an average color temperature of the group of skin color candidate pixels and an average color temperature of the group of gray candidate pixels is minimized, or both, and

a computation means for calculating the color temperature of the photographing light source from the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels, and wherein

said correction means corrects the image signals of the color image multiplied by the optimized coefficients, by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[Claim 11]

A recording medium on which a method of correcting white balance according to any one of claims 1 to 8 is recorded in a computer-readable manner as a program to be executed by a computer.

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[Technical Field of the Invention]

The present invention relates to a technique for correcting white balance of a color image when digital image processing is performed on an input image signal to form a print.

[0002]

[Prior Art]

The conventional silver salt photography generally uses an analog exposure (area exposure or direct exposure) system to obtain a print. That is, a developed negative film is positioned at a predetermined printing position and irradiated with light from a white light source (halogen lamp or the like), and light transmitted through the negative film is imaged on photographic paper, thus making an exposure.

[0003]

In recent years, printing apparatuses using digital exposure, i.e., digital photoprinters, have been put to practical use. Digital photoprinters perform a process in which an image recorded on a photographic film such as a negative film or a color reversal film is photoelectrically read to obtain a digital signal representing the read image, various kinds of image processing are performed on the digital signal to obtain image data for recording, scanning exposure using recording light modulated according to this image data is performed on a photosensitive material to form an image (latent image) on the photosensitive material to obtain a (finished) print.

[0004]

Such digital photoprinters process images as digital image data and can therefore perform image processing not only on photographed images on photographic films but also on photographed images obtained with digital still cameras (DSC) or the like, image data recorded in the form of digital data on various kinds of recording media, e.g., magnetic recording media, such as CD-R, floppy disks, and removable hard disks (Zip, Jaz, etc.), and MO disks (magneto-optical recording media) to output prints.

[0005]

Color negative films have been commonly used by typical users. The conditions of photography of original images on negative films are not always uniform. For example, subjects are photographed in light from various light sources, e.g., daylight and fluorescent lamp. Therefore, in case of forming prints from a developed negative film when images in the developed negative film is printed without changing the characteristics of light from a printing light source, color tints of light from photographing light sources in which subjects have been

photographed are directly reflected in the prints, which leads to forming undesirable prints in some cases.

[0006]

Various systems have therefore been contrived to adjust white balance on the prints. A typical example of such systems is an LATD method based on the Evans' theorem (hypothesis) stating "the average of all colors in the world is gray". The LATD (large area transmission density) is the average transmission density through an entire frame on a photographic film. In the LATD method, the LATD of each frame on a color negative film is measured and the characteristics of a printing light source are changed according to the red, green and blue density levels so that the average color on the print is close to gray.

[0007]

On the other hand, digital still cameras (DSCs) have recently come into widespread use. An image forming process in a DSC and an image forming process using a color negative film can be regarded as the same with respect to photographing a scene but differ essentially in that a DSC image itself is an object of appreciation while an image on a color negative film is not directly viewed as an object of appreciation. DSC images themselves, therefore, must be fine, well-white-balanced images when viewed before being output as prints. DSCs are also used for photography with various light sources like cameras using color negative films and are unable to reliably obtain a satisfactory image without a function for correcting white balance. Therefore almost all the recent DSCs have an AWB (auto white balance) function for automatically correcting white balance.

[0008]

[Problems to be Solved by the Invention]

The above-described LATD method has been practiced

with some measure of success but it is responsible for production of undesirable prints. One of the printing failures due to the LATD method is color failure that imbalance of a color occurs in a print. For example, in a case where white balance correction based on the LATD method is made on an image obtained by photographing a woman in red dress, a cyan color, which is a complementary color to red, is added throughout the entire frame to make the entire frame close to gray, thereby reducing the vividness of the red of the dress and making the woman's face pale.

In a case where the entire frame area of a photographed scene is reddish, it is impossible to ascertain whether the reddishness is ascribable to the light source or the subject. In this case, the LATD method achieves success in correction if the light source is the cause, but it causes such a color failure described above if the subject is the cause.

[0009]

The above-mentioned AWB function of DSCs is essentially based on the Evans' theorem like the negative film/printing system and entails the same problem as that of white balance correction based on the LATD in the negative film/printing system.

That is, while about 60 to 70% of DSC images after AWB are obtained as well-color-balanced good images as average performance of the Evans' theorem, the remaining 30 to 40% of the DSC images need some additional color balance correction because of AWB function failure. If white balancing is not performed at the time of printing from the DSC images, about 30 to 40% of resulting prints are unsatisfactory, unacceptable prints.

[0010]

As described above, the conventional art LATD method

based on the Evans' theorem makes white balance correction by assuming that the average of colors through the entire frame of an image is gray, but it is not sufficiently effective in correcting white balance because of its inability to find true gray in an image, and often produces a contrary correction effect.

The present invention has been made in view of the aforementioned problems and has an object to provide a technique capable of properly correcting white balance at a high hit rate when digital image processing is performed on input image data to form a print.

[0011]

[Means to Solve the Problems]

In order to attain the object described above, the first aspect of the present invention provides a method of correcting white balance, comprising the steps of estimating, by using at least gray and/or skin color information contained in an input color image, a color temperature of a photographing light source with which the color image has been formed, and correcting an image signal of the color image based on the estimated color temperature. Preferably, only the gray and skin color information is used.

[0012]

Preferably, the estimating step includes multiplying image signals of each pixel in the input color image by set coefficients, subsequently setting pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels and/or pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels, optimizing the coefficients so that the number of the skin color candidate pixels and/or the gray candidate pixels is maximized, and estimating the color temperature of the photographing light source from an average color temperature

of a group of skin color candidate pixels and/or an average color temperature of a group of gray candidate pixels obtained by optimizing the coefficients, and wherein the image signals of the color image multiplied by the optimized coefficients are corrected by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

Preferably, the color temperature of the photographing light source is estimated from the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels obtained by optimizing the coefficients so that the number of the skin color candidate pixels and the gray candidate pixels is maximized.

[0013]

Preferably, the estimating step includes multiplying image signals of each pixel in the input color image by set coefficients, subsequently setting pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels and pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels, estimating the color temperature of the photographing light source from an average color temperature of the group of skin color candidate pixels and an average color temperature of the group of gray candidate pixels obtained by optimizing the coefficients so that a difference between the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels is minimized, and wherein the image signals of the color image multiplied by the optimized coefficients are corrected by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[0014]

Preferably, the estimating step includes multiplying image signals of each pixel in the input color image by set coefficients, subsequently setting pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels and pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels, optimizing the coefficients so that the number of the skin color candidate pixels and the gray candidate pixels is maximized and a difference between an average color temperature of the group of skin color candidate pixels and an average color temperature of the group of gray candidate pixels is minimized, and estimating the color temperature of the photographing light source from the average color temperatures of the group of skin color candidate pixels and the group of gray candidate pixels obtained by optimizing the coefficients, and wherein the image signals of the color image multiplied by the optimized coefficients are corrected by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[0015]

Preferably, when each of the blackbody locus curve of the skin color and the blackbody locus curve of the gray is set, a spectral sensitivity of a photographing apparatus used to photograph the input image is used as a spectral sensitivity distribution.

[0016]

Preferably, when each of the blackbody locus curve of the skin color and the blackbody locus curve of the gray is set, a spectral sensitivity of BT709 is used as a spectral sensitivity distribution.

[0017]

Similarly, in order to attain the object described above, the second aspect of the present invention provides an apparatus for correcting white balance when digital image processing is performed on an input color image to form a print, comprising an estimation means for estimating, by using gray and/or skin color information contained in the input color image, a color temperature of a photographing light source with which a color image has been photographed, and a correction means for correcting an image signal of the color image based on the estimated color temperature.

[0018]

Preferably, the estimation means for estimating a color temperature of the photographing light source includes a multiplication means for multiplying image signals of each pixel in the input color image by set coefficients, a detection means for detecting, based on the result of multiplication, pixels in the vicinity of a blackbody locus curve of skin color as skin color candidate pixels, and a detecting means for detecting, based on the result of multiplication, pixels in the vicinity of a blackbody locus curve of gray as gray candidate pixels, an optimization means for optimizing the coefficients so that the number of the skin color candidate pixels and the gray candidate pixels is maximized or an optimization means for optimizing the coefficients so that a difference between an average color temperature of the group of skin color candidate pixels and an average color temperature of the group of gray candidate pixels is minimized, or both, and a computation means for calculating the color temperature of the photographing light source from the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels, and wherein the correction means corrects the image

signals of the color image multiplied by the optimized coefficients, by an amount corresponding to a difference between the estimated color temperature and a color temperature of reference white.

[0019]

Similarly, in order to attain the object described above, the third aspect of the present invention provides a recording medium on which a method of correcting white balance according to any one of claims 1 to 8 is recorded in a computer-readable manner as a program to be executed by a computer.

[0020]

[Embodiment of the Invention]

The apparatus for correcting white balance, the method for correcting white balance and the recording medium on which a program for carrying out the methods is recorded according to the present invention will be described below in detail with reference to preferred embodiments of the invention shown in the accompanying drawings.

[0021]

Fig. 1 is a block diagram schematically showing an embodiment of a white balance correction apparatus in accordance with the present invention.

The white balance correction apparatus shown in Fig. 1 is arranged to correct white balance when digital image processing is performed on input image signal to form a print. For example, it is provided in an image processor such as a digital photoprinter.

[0022]

The white balance correction apparatus 10 in Fig. 1 is constituted mainly of a light source color temperature estimation means 12 for estimating the color temperature of a photographing light source at the time of photographing a

subject to obtain an input color image, and an image signal correction means 14 for making white balance correction by using the color temperature of the photographing light source estimated by the light source color temperature estimation means 12.

The light source color temperature estimation means 12 has a coefficient multiplication means 16, a skin color candidate detection means 18, a gray candidate detection means 20, a coefficient optimization means 22, and a light source color temperature computation means 24.

[0023]

Before describing the functions of these means, the principle of the present invention will first be described.

While the conventional white balance correction method corrects a color imbalance on the basis of the Evans' theorem so that the average of colors through the entire frame is gray, the present invention is characterized by positively searching for a gray portion in a frame and by correcting an imbalance by performing exposure so that the gray candidate point is finished in gray on a print.

[0024]

The same white balance correction method is applied to an image forming process using a color negative film and to an image forming process in a digital still camera (DSC). The principle of the present invention will be explained with respect to a case where a scene is photographed with a DSC under ordinary conditions.

A case where a scene containing a gray portion (in gray or in a color close to gray) is photographed with a DSC in natural daylight at a color temperature of 4000K will be considered.

Image signals (R, G, B) of the photographed gray portion are plotted in a chromaticity diagram by being

converted into chromaticity coordinates (r, b) by the following equations (1):

$$\begin{aligned} r &= R/(R + G + B) \\ b &= B/(R + G + B) \end{aligned} \quad \text{..... (1)}$$

[0025]

Fig. 2 shows the chromaticity diagram. In Fig. 2, a curve G is a blackbody locus of gray. As is well known, a blackbody locus is formed in such a manner that if a color temperature is T; a blackbody radiation energy distribution at color temperature T is  $P(\lambda)$ ; a spectral reflectance distribution of a subject is  $\rho(\lambda)$ ; and a spectral sensitivity distribution of a CCD sensor is  $S_i(\lambda)$  (where  $i = B, G, R$ ),  $E_i$  is calculated by the following equation (2),

$$E_i = \int P(\lambda)\rho(\lambda)S_i(\lambda)d\lambda \quad \text{..... (2)}$$

and this  $E_i$  is plotted in a chromaticity diagram by being converted into chromaticity coordinates (r, b) by the equation (1) shown above while color temperature T is changed.

A blackbody locus exists with respect to each of spectral distributions of a CCD sensor and each of the colors of a subject, and a blackbody locus of gray is obtained by setting the spectral reflectance  $\rho(\lambda)$  of a subject in gray to 1. Fig. 3 shows spectral sensitivity distributions of a typical CCD sensor. It is preferable to use such  $S_i(\lambda)$  characteristic of a CCD sensor. However, BT709 ideal spectral sensitivity distributions such as shown in Fig. 5 may alternatively be used.

[0026]

If the above-mentioned image signal of a gray portion is plotted in the chromaticity diagram shown in Fig. 2, it is considered to be scattered in the vicinity  $G_0$  of the point at 4000K on the blackbody locus of gray G.

In recent ordinary DSCs having an AWB (auto white

balance) function, the gray portion is scattered in the vicinity G1 of a standard white (e.g., 5500K) if the AWB function is suitably performed. However, if the AWB function is not suitably performed, the gray portion is scattered in a region at an unknown position remote from the photographing temperature 4000K (e.g., a region indicated by symbol A in Fig. 2).

[0027]

To convert the gray portion included in the DSC image at such an unknown position indicated by symbol A in Fig. 2 to the vicinity G1 of a reference white (e.g., 5500K), white balance correction is made in a printer. It is possible to expect that a well-gray-balanced good print will be obtained by performing this conversion with respect to each of the pixels of the image.

Since the position of the region A is unknown, it is impossible to make a direct conversion from the region A to the vicinity G1 of a reference white (e.g., 5500K). Therefore, in the present invention, the desired conversion is performed in two steps.

[0028]

That is, conversions expressed by two vectors  $\alpha$  and  $\beta$  shown in Fig. 2 are made.

The vector  $\alpha$  is a vector for correction of the amount of deviation from the blackbody locus G due to the imperfection of the AWB function of the DSC. The conversion using the vector  $\alpha$  is performed as a conversion from the region A shown in Fig. 2 to the region G0 on the blackbody locus G.

The vector  $\beta$  is a vector for conversion from the region G0 to the vicinity G1 of the reference white (e.g., 5500K) along the blackbody locus G.

The conversion from the region A to the vicinity G1 of

the reference white (e.g., 5500K) as shown in Fig. 2 can be achieved by combining the two vectors  $\alpha$  and  $\beta$ .

[0029]

The description will again be made on the respective means shown in Fig. 1.

It is difficult to obtain vector  $\alpha$  expressing the conversion from the region A shown in Fig. 2 to the region G0 on the blackbody locus G in the above-described two conversion steps using vectors  $\alpha$  and  $\beta$ . If the region G0 can be obtained, the color temperature T of the photographing light source can be estimated therefrom. Thus, it is easy to obtain the vector  $\beta$  expressing the conversion from G0 (color temperature T) to G1 (color temperature of 5500K) along the blackbody locus G.

The light source color temperature estimation means 12 obtains the vector  $\alpha$  to make the corresponding conversion, and the image signal correction means 14 obtains the vector  $\beta$  to make the corresponding conversion.

[0030]

The AWB function of the DSC is performed in such a manner that the image signals R, G, and B of all the pixels, which are collected immediately after photographing, are uniformly multiplied by constants. This multiplication using constants is a linear transformation. If the image signals have deviated from the blackbody locus by this operation, the process of making the gray portion scattered mainly at temperatures in the vicinity (G0 in Fig. 2) of the color temperature of the photographing light source on the blackbody locus (4000K in this case) must be the operation having the effect reverse to that of the operation performed as the AWB function.

The transformation which is the reverse of the above-described AWB function (linear transformation) of the DSC is

also a linear transformation. Therefore the image signals R, G, and B are multiplied by predetermined coefficients (in the process shown in Fig. 2, the image signals R, G, and B are converted into chromaticity coordinates). The coefficient multiplication means 16 performs this multiplication.

[0031]

The coefficient multiplication means 16 respectively multiplies R and G in the DSC image signals R, G and B by predetermined coefficients  $\alpha_1$  and  $\alpha_2$  as shown by the following equations (3) to convert R and G into R' and G'.

$$R' = \alpha_1 R$$

$$G' = \alpha_2 G \quad \text{..... (3)}$$

For this conversion, it is not necessary to change the three signals; changing two of the signals may suffice.

The region A to which the point corresponding to the original gray has been moved is unknown and it is impossible to identify the portion corresponding to the original gray. Therefore the gray candidate detection means 20 compares the signal converted by the linear transformation with the blackbody locus of gray, recognizes pixels detected in the vicinity of the blackbody locus as highly probable to correspond to the original gray, and sets the pixels as gray candidate pixels. Determination as to whether pixels are in the vicinity of the blackbody locus may be made according to whether the distance in terms of chromaticity coordinates (r, b) from the blackbody locus is within the range of 0.01.

[0032]

The coefficient optimization means 22 counts the number of gray candidate pixels detected by the gray candidate detection means 20, and optimizes the coefficients  $\alpha_1$  and  $\alpha_2$  by making the coefficient multiplication means 16 and the gray candidate detection means 20 perform the above-

described operations while changing the predetermined coefficients  $\alpha_1$  and  $\alpha_2$  so that the number of gray candidate pixels is maximized.

A suitable method, not particularly specified, may be used for this optimization. For example, a simplex method, which is a standard method for numerical value calculation, is preferably used. The coefficients  $\alpha_1$  and  $\alpha_2$  in the equations (3) for linear transformation are obtained by the above-described optimization as the components of vector  $\alpha$  corresponding to the operation reverse to the AWB function of the DSC. That is,  $\alpha = (\alpha_1, \alpha_2)$ .

[0033]

To improve the accuracy of optimization, information on a color other than gray may also be used. Skin color can be selected from subject colors as a color appearing frequently and comparatively stable in color tint among its variations. Skin color is thought to vary considerably with respect to human races (white race, yellow-skinned race, black race). However, it is known through spectrometric analysis that skin color varies mainly in lightness among races and does not vary largely in spectral composition, that is, skin color has only small variation in the color tint. This characteristic of skin color can be utilized for color identification.

Therefore the skin color candidate detection means 18 also sets a blackbody locus (not shown) with respect to skin color as well as that of gray, and detects skin color candidate pixels having a color close to the blackbody locus of skin color from the image signals multiplied by the coefficients in the coefficient multiplication means 16.

[0034]

The coefficient optimization means 22 also counts the number of skin color candidate pixels detected by the skin

color candidate detection means 18, combines it with the number of gray candidate pixels described above, and optimizes the coefficients  $\alpha_1$  and  $\alpha_2$  so that the number of these pixels is maximized, thus improving the accuracy with which the coefficients  $\alpha_1$  and  $\alpha_2$  are optimized.

It is also expected that if a scene including a gray portion and a skin color portion is photographed with uniform light, the average color temperatures of gray candidate pixels and skin color candidate pixels, detected as pixels having colors close to the blackbody locus, coincide with each other. In optimization in the coefficient optimization means 22, therefore, optimization of the above-described coefficients may be performed by setting an objective function for "minimizing the difference between the average color temperatures of the group of gray candidate pixels and the group of skin color candidate pixels".

[0035]

Further, the two above-described methods may be combined to optimize the above-described coefficients by setting the objective function for "maximizing the number of gray candidate pixels and skin color candidate pixels" and the objective function for "minimizing the difference between the average color temperatures of the group of gray candidate pixels and the group of skin color candidate pixels".

The method using these two objective functions further improves the optimization accuracy.

[0036]

The light source color temperature computation means 24 converts the image signals by using the coefficients  $\alpha_1$  and  $\alpha_2$  optimized in the above-described manner, computes the average color temperature  $T_g$  of the group of gray candidate

pixels on the blackbody locus of gray and the average color temperature  $T_f$  of the group of skin color candidate pixels on the blackbody locus of skin color, and computes the color temperature  $T$  of the photographing light source from these average color temperatures. The color temperature  $T$  may be computed by averaging as shown by  $T = (T_g + T_f)/2$  or may be obtained as  $T = T_g$  if gray is more important than skin color. The color temperature  $T$  of the photographing light source is thus estimated.

[0037]

Finally, the image signal correction means 14 makes a conversion from the color temperature  $T$  to the reference white (e.g., 5500K) along the blackbody locus. This conversion can be expressed as linear transformation of the R- and B-signals shown by the following equations:

$$\begin{aligned} R'' &= \beta_1 R' \\ B'' &= \beta_2 B \end{aligned} \quad \text{..... (4)}$$

These coefficients  $\beta_1$  and  $\beta_2$  are obtained as the components of vector  $\beta$ .

The image signal correction means 14 performs conversion using this vector  $\beta$  on each pixel to complete white balance correction with respect to each pixel.

[0038]

The above-described conversion process is summarized below. The conversion from the point A to the reference white (e.g., 5500K) G1 as shown in Fig. 2 is realized as a resultant of transformation by vector  $\alpha$  and transformation by vector  $\beta$ , as shown by the following equations (5):

$$\begin{aligned} R'' &= \alpha_1 \beta_1 R \\ G'' &= \alpha_2 G \\ B'' &= \beta_2 B \end{aligned} \quad \text{..... (5)}$$

The equations (5) include a change in lightness as well as a color balance. These equations may be rewritten

as shown below by assuming the G signal is constant.

$$R'' = (\alpha_1 \beta_1 / \alpha_2) R$$

$$G'' = G$$

$$B'' = (\beta_2 / \alpha_2) B \quad \dots\dots (6)$$

[0039]

The operation of this embodiment will be described with reference to the flowchart of Fig. 4.

First, in step 100, a scene is photographed in light from a certain light source by using a digital still camera (DSC).

In step 110, the image signals R, G, and B of the image formed by the DSC are input.

[0040]

In step 120, image signal optimization processing is performed by the coefficient multiplication means 16, the skin color candidate detection means 18, the gray candidate detection means 20 and the coefficient optimization means 22 of the light source color temperature estimation means 12. This processing is intended to restore the image signals, which are caused to deviate from a blackbody locus by the AWB function of the DSC, to signals (raw data) without a deviation in the vicinity of the blackbody locus. The coefficient multiplication means 16 multiplies all the image signals by predetermined coefficients. The skin color candidate detection means 18 compares this data with the blackbody locus of skin color to detect data (skin color candidate pixels) considered to have a color in the vicinity of the skin color on the blackbody locus. The gray candidate detection means 20 compares this data with the blackbody locus of gray to detect data (gray candidate pixels) considered to have a color in the vicinity of the gray on the blackbody locus.

[0041]

The coefficient optimization means 22 counts the detected skin color candidate pixels and the detected gray candidate pixels, and optimizes the above-described coefficients by resetting the coefficients and repeating setting the coefficients such that the number of the skin color candidate pixels and gray candidate pixels is maximized or the difference between the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels is minimized, or both of these conditions are satisfied.

[0042]

In step 130, the light source color temperature computation means 24 computes the estimated value  $T$  of the color temperature of the photographing light source from the average color temperature  $T_f$  of the group of skin color candidate pixels and the average color temperature  $T_g$  of the group of gray candidate pixels, obtained by multiplication by the optimized coefficients.

Next, in step 140, the image signal correction means determines the amount of correction from the estimated light source color temperature  $T$  to the reference white (e.g., 5500K), and corrects the white balance of all the pixels by this amount of correction.

Finally, in step 150, other kinds of image processing are performed on the image signals, and a finished print is output from the printer.

[0043]

In addition, if the white balance correction method described above is recorded as a computer-executable program on a computer-readable recording medium, the white balance correction method of the present invention may be carried out in a suitable apparatus such as an image processor by

loading the program from the recording medium into the apparatus employed.

[0044]

The present invention will be further described with respect to concrete examples thereof.

(Example 1)

The performance of the above-described white balance correction method was tested when prints were formed from 309 frames of DSC images obtained by picture-taking with typical two DSC models from Fuji Photo Film Co., Ltd. For comparison with the prints formed in accordance with the present invention, original images (prints which were output without correction after AWB in the DSCs) and prints which were obtained by performing on the images from the DSCs white balance correction based on the conventional art were prepared. The prints evaluated were sorted into good ones, unsatisfactory ones, and defective ones. Only the good ones were counted as passed items.

[0045]

First, 8-bit DSC image signals were converted into subject-linear signals R0, G0, and B0, as described below.

8-bit DSC image signals R, G, and B obtained by picture-taking with the DSC are processed as described below. First, subject-linear signals R0, G0, and B0 generated from the CCD sensor are converted by gamma-0.45 nonlinear transformation shown by the following equations (7):

$$\begin{aligned} R1 &= 1.099 \cdot R0^{0.45} - 0.099 \\ G1 &= 1.099 \cdot G0^{0.45} - 0.099 \\ B1 &= 1.099 \cdot B0^{0.45} - 0.099 \end{aligned} \quad \text{..... (7)}$$

Color-difference signals Y1, Cr1 and Cb1 are formed therefrom as shown the following equations (8):

$$\begin{aligned} Y1 &= 0.30R1 + 0.59G1 + 0.11B1 \\ Cr1 &= 0.70R1 - 0.59G1 - 0.11B1 \end{aligned}$$

$$Cb1 = -0.30R1 - 0.59G1 + 0.89B1 \quad \dots\dots (8)$$

A color-difference matrix operation is performed on these signals to improve the chromaticity, thereby making conversions into color-difference signals Y2, Cr2, and Cb2 shown by the following equations (9):

$$\begin{aligned} Y2 &= Y1 \\ Cr2 &= 1.625Cr1 + 0.2734Cb1 \\ Cb2 &= -0.08203Cr1 + 1.6094Cb1 \quad \dots\dots (9) \end{aligned}$$

[0046]

Finally, R, G and B signals are restored and converted into 8-bit signals by the following equations (10) to obtain 8-bit DSC image signals R, G, and B.

$$\begin{aligned} R &= Y2 + Cr2 \\ G &= Y2 - 0.51Cr2 - 0.18Cb2 \\ B &= Y2 + Cb2 \quad \dots\dots (10) \end{aligned}$$

To convert 8-bit DSC image signals R, G, and B into subject-linear signals R0, G0, and B0, therefore, the inverse operation process starting from processing R, G, and B signals and perform the operations in the order from equations (10), equations (9), equations (8), and equations (7) may be performed. This inverse operation process was performed to obtain the subject-linear signals R0, G0, and B0.

[0047]

Next, the amounts of white balance correction based on optimization of subject-linear signals R0, G0, and B0 were computed.

To enable this computation, the blackbody locus of gray and the blackbody locus of skin color were formed in advance by using the spectral sensitivity of the DSC used for picture-taking. Operations for optimizing the R0, G0, and B0 signals were performed by using these loci to obtain vector  $\alpha$  and vector  $\beta$ , and white balance correction signals

R", G", and B" were obtained as shown by equations (11) below. This optimization computation was performed by optimizing the coefficients so that the number of gray candidate pixels and skin color candidate pixels was maximized and the difference between the average color temperature of the group of skin color candidate pixels and the average color temperature of the group of gray candidate pixels was minimized.

$$\begin{aligned} R'' &= (\alpha_1 \beta_1 / \alpha_2) R_0 \\ G'' &= G_0 \\ B'' &= (\beta_2 / \alpha_2) B_0 \end{aligned} \quad \dots\dots (11)$$

To convert these white balance correction signals R", G", and B" into 8-bit image signals, the operations may successively be performed in the order of equations (7), equations (8), equations (9), and equations (10). These signals were output to obtain a white-balance-corrected print.

[0048]

Table 1 shows the results of comparison between the prints after white balance correction in accordance with the present invention, the original images and those obtained by the conventional art.

(Table 1)

	Original images	Conventional art	Present Invention
Passing rate (%)	65.3	78.3	90.0

As shown in Table 1, the passing rate of the present invention was higher by about 12 points than that of the conventional art, and the high white balance correction performance of the present invention was confirmed.

[0049]

(Example 2)

In Example 1, the names of DSCs were known and the spectral sensitivity and the color processing algorithm were also known. However, if the white balance correction method of the present invention is used as printing software, it is desirable to ensure applicability to correction of DSC images formed by unknown models (or to ensure robustness).

In Example 2, a white balance correction test was made with respect to 309 frames of DSC images obtained by picture-taking with typical two DSC models from Fuji Photo Film Co., Ltd, which are same as those used in Example 1, and 240 frames of images obtained by picture-taking of the same scenes (16 frames) with fifteen unidentified models from other manufactures.

[0050]

In this example, white balance correction in accordance with the present invention was performed under the assumption that all models were DSCs having ideal spectral sensitivities, because, even if the model cannot be identified, the performance of any model can be approximated to the ideal spectral sensitivity characteristics of BT709 as shown in Fig. 5 by virtue of the combination of the spectral sensitivity and the color processing algorithm.

That is, in this example, the spectral sensitivity distributions of BT709 shown in Fig. 5 were used as spectral sensitivity distribution  $S_i$  of the CCD sensor in equation (2) for obtaining a blackbody locus.

In this example, since DSCs having the ideal spectral sensitivities do not need the color processing algorithm for improving the chromaticity, it is not necessary to perform, for conversion of 8-bit DSC image signals R, G, and B into subject-linear signals  $R_0$ ,  $G_0$ , and  $B_0$ , the inverse operation process from equations (10) to equations (7) required in Example 1, and the inverse operation of equations (7) can be

immediately performed.

[0051]

The blackbody locus of gray and the blackbody locus of skin color were formed in advance by using the ideal spectral sensitivity of BT709, the operations for optimizing R0, G0, and B0 signals were performed by using these loci to obtain vector  $\alpha$  and vector  $\beta$ , as in Example 1. White balance correction signals R'', G'', and B'' expressed by equations (11) were obtained therefrom.

These signals were converted by gamma-0.45 nonlinear conversion and converted signals were 8-bit quantized to obtain 8-bit image signals, which were supplied to a printer to obtain a white-balance-corrected print.

[0052]

The prints thus obtained were evaluated, as were those in Example 1. The prints evaluated were sorted into good ones, unsatisfactory ones, and defective ones. Only the good ones were counted as passed items. Table 2 shows the evaluation results.

(Table 2)

	Typical models from Fuji Photo Film Co., Ltd. (309 frames) Present invention	16 scenes (240 frames) by 15 models from other manufacturers		
		Original images	Conventional Art	Present invention
Passing rate (%)	88.0	47.1	70.0	76.2

[0053]

As shown in Table 2, substantially the same passing rate (88%) as that in Example 1, though slightly lower, was maintained with respect to two typical models from Fuji Photo Film Co., Ltd. (309 frames). With respect to the

fifteen models from the other manufacturers (240 frames), the absolute value of the passing rate achieved by the present invention was low (76%) but higher by about 6 points than that achieved by the conventional art.

The reason for the low passing rate may be because, as can be understood from the considerably low passing rate (47%) of the original images, the number of evaluated scenes was small (16 scenes) and the images had imbalance details, and not because the actual DSCs were assumed to be DSCs having ideal spectral sensitivities.

As described above, according to Example 2, the white balance correction method of the present invention is sufficiently effective when provided as common software and achieves a sufficiently high white balance correction effect even with respect to image forming apparatus models whose spectral sensitivity and color processing algorithm are unknown.

[0054]

In the present embodiment of the present invention, as described above in detail, an algorithm using only gray and/or skin color information in a DSC image is constructed to correct white balance at the time of printing, and the apparatus and method of the present invention are advantageously effective in correcting white balance in comparison with the conventional art, as can also be understood from the examples. The effect of determining whether a color tint of the entire of an image is due to the photographing light source or the subject in accordance with the present invention, is advantageously improved in comparison with the conventional art having an imperfection with respect to this effect. In particular, the correction performance of the present invention is substantially perfect with respect to a high color temperature of a shaded

scene or a scene under cloudy weather (7000 to 10,000K), so that while an entirely bluish print in which a human face has color subsidence is formed in such a situation by the conventional art, a print in which revived white is exhibited and in which skin color is natural can be obtained according to the present invention.

The above-described embodiment of the present invention has been described with respect to correction of DSC images, but the present invention is not limited to this. The white balance correction method of the present invention can also be applied to correction of images on color negative films.

[0055]

The apparatus for correcting white balance and the method of correcting white balance, as well as the recording medium on which a program for carrying out the method is recorded, all of which the present invention provides, have been described in detail. Needless to say, the present invention is not limited to the described embodiments and examples, and various modifications and changes of the described embodiments and examples can be made without departing from the scope of the invention.

[0056]

[Effects of the Invention]

According to the present invention, as described above, an algorithm is constructed to correct white balance of an input color image of a subject photographed in light from a certain light source by estimating the color temperature of the photographing light source only from gray and/or skin color information contained in the input color image, thereby enabling suitable white balance correction at a high hit rate with respect to any input images regardless of DSC models used for forming images.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[FIG. 1] Fig. 1 is a block diagram schematically showing an embodiment of a white balance correction apparatus in accordance with the present invention.

[FIG. 2] Fig. 2 is a chromaticity diagram for explaining the principle of white balance correction in the embodiment.

[FIG. 3] Fig. 3 is a graph showing spectral sensitivity distributions of a typical CCD sensor.


[FIG. 4] Fig. 4 is a flowchart showing operation of the embodiment.

[Fig. 5] Fig. 5 is a diagram showing BT709 spectral sensitivity distributions.


[Legend]

- 10 white balance correction apparatus
- 12 light source color temperature estimation means
- 14 image signal correction means
- 16 coefficient multiplication means
- 18 skin color candidate detection means
- 20 gray candidate detection means
- 22 coefficient optimization means
- 24 light source color temperature computation means


【TYPE OF THE DOCUMENT】 Drawings  
【FIG. 1】

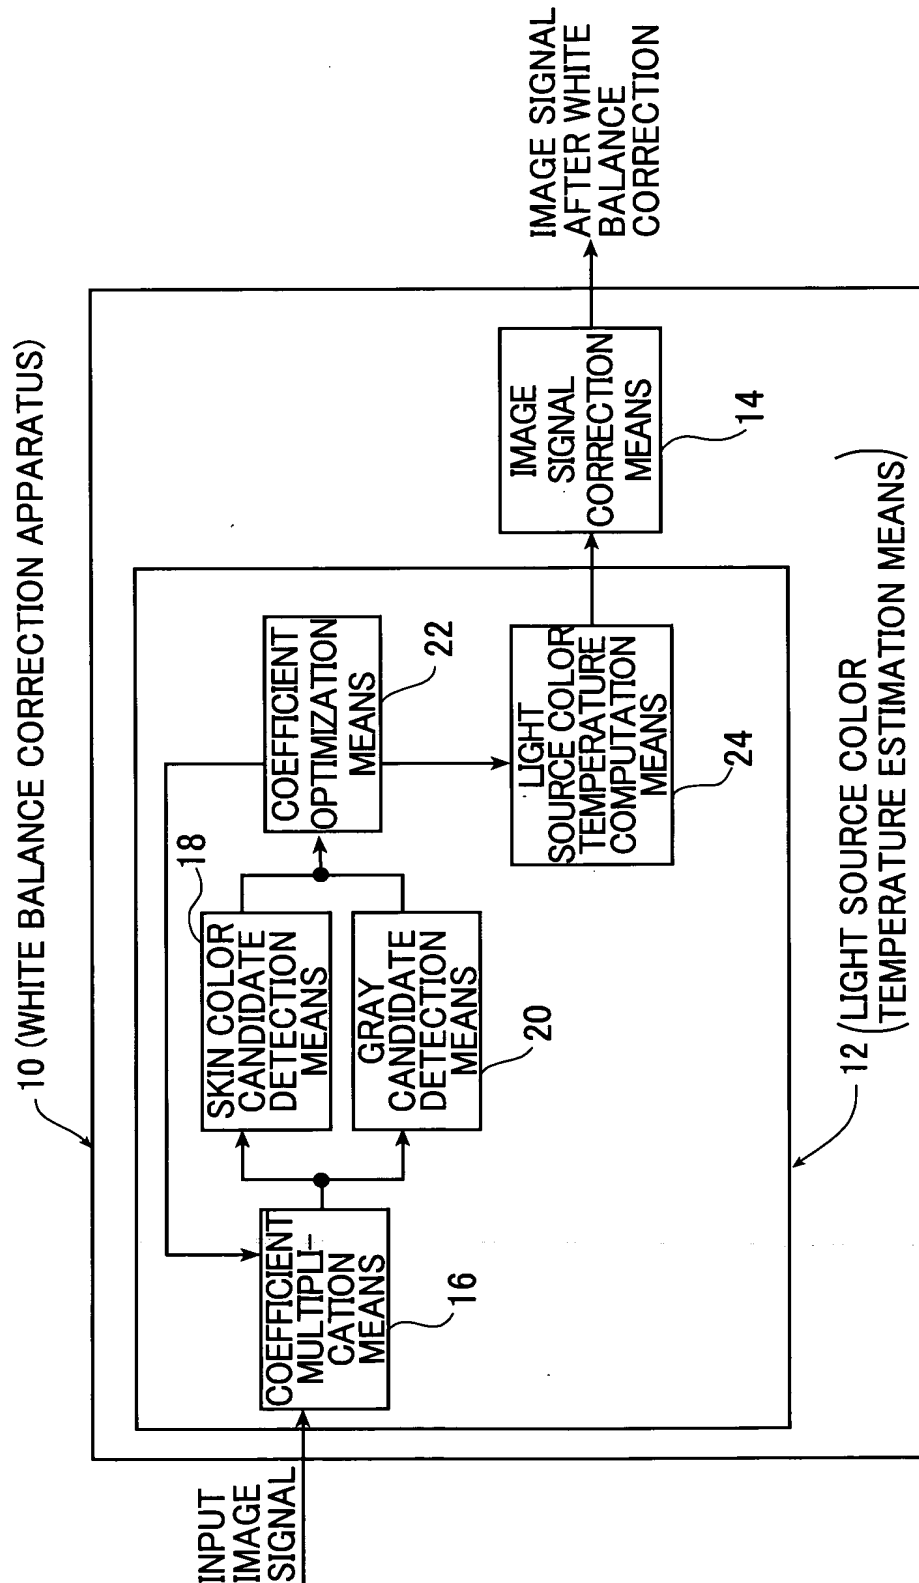


【FIG. 2】

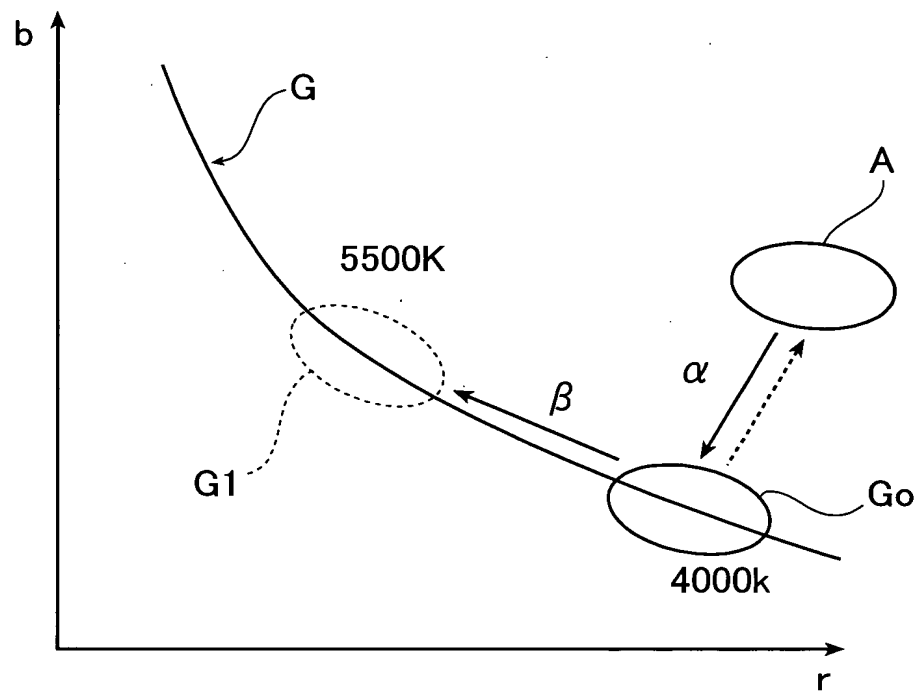


【FIG. 3】

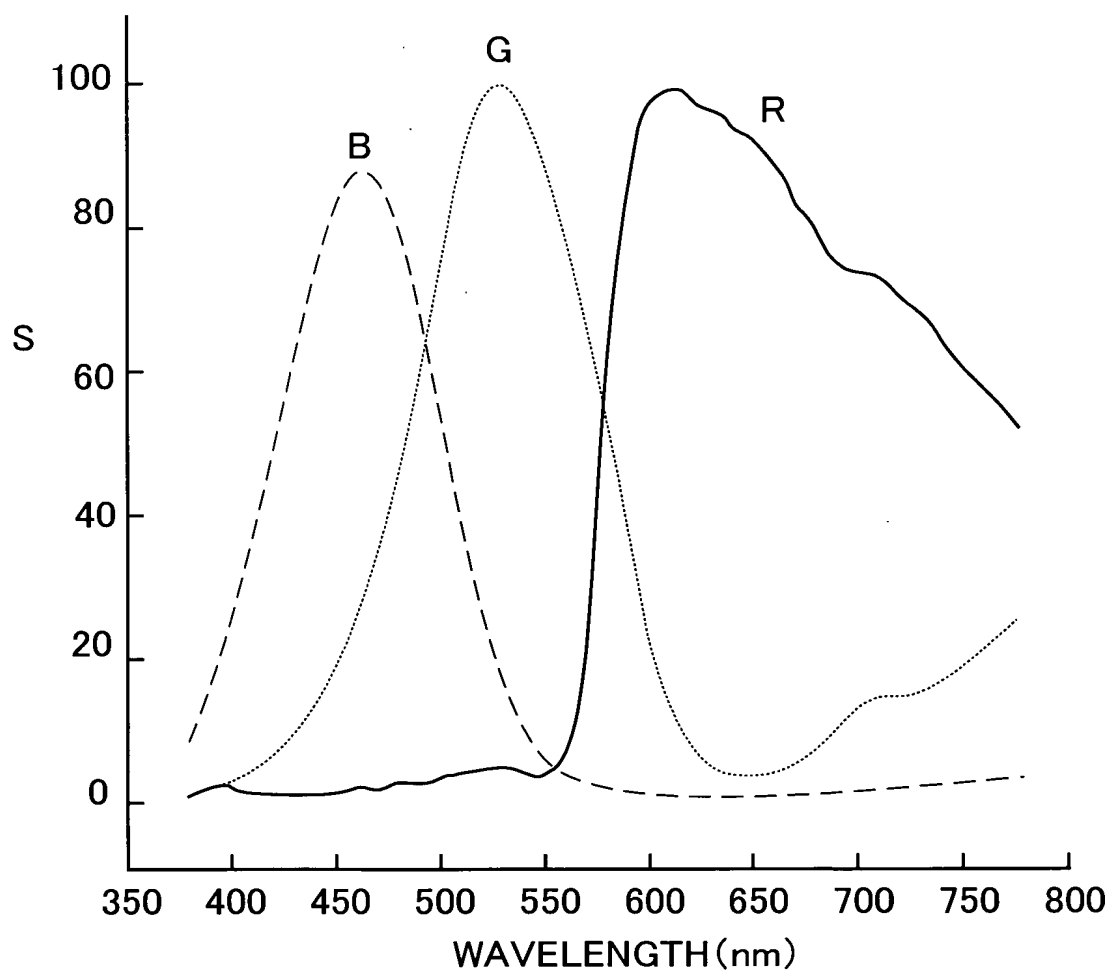

【FIG. 4】

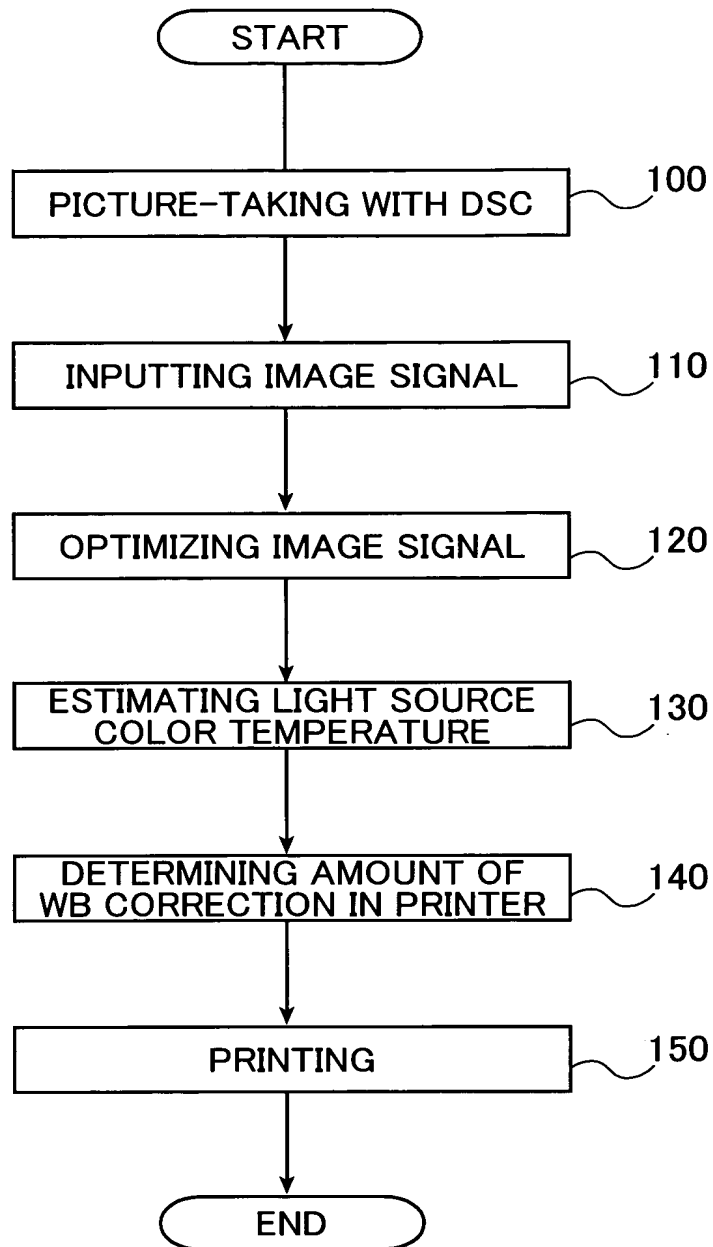

【FIG. 5】

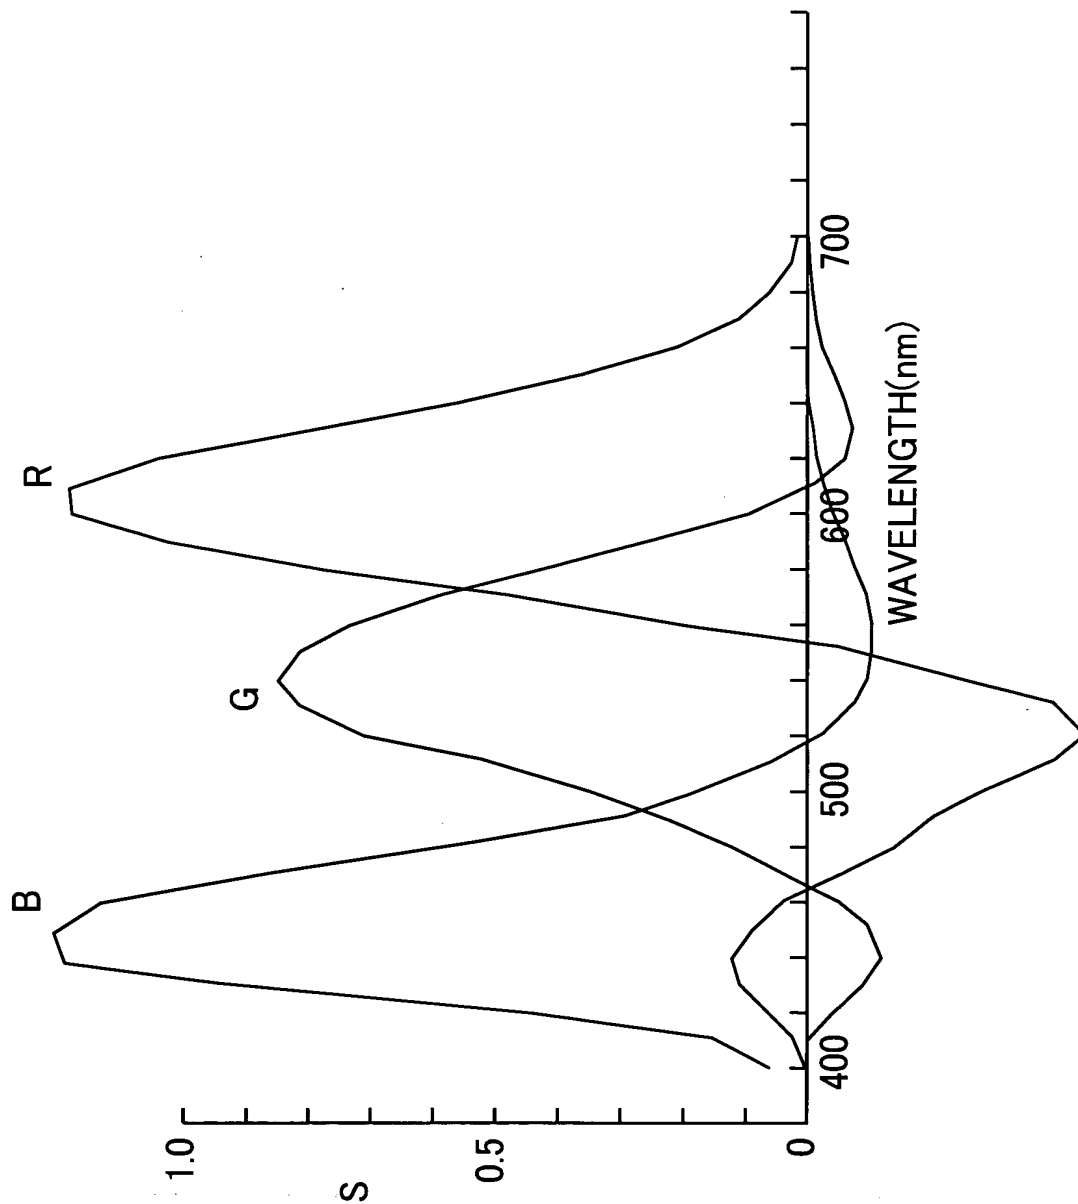

[TYPE OF THE DOCUMENT] Abstract

[ABSTRACT]

[Object] It is an object to properly correct white balance upon forming a print from an input image.

[Means for Solution]

The object can be solved by providing a method of correcting white balance, comprising the steps of estimating, by using gray and/or skin color information contained in an input color image, a color temperature of a photographing light source with which the color image has been formed, and correcting an image signal of the color image based on the estimated color temperature.

[Selected Drawing] FIG. 2